

# Freedom II Handset Lifter User Guide

This lifter is designed to allow you to answer and end calls remotely from your desk when using your Freedom II cordless headset.

## In the box:

Handset Lifter  
External Microphone Sensor Cord  
Adhesive Tape




Surround microphone #1

Length can be adjustable according to the location of handset

Lifter arm

adjustment level  
(Slide switch)

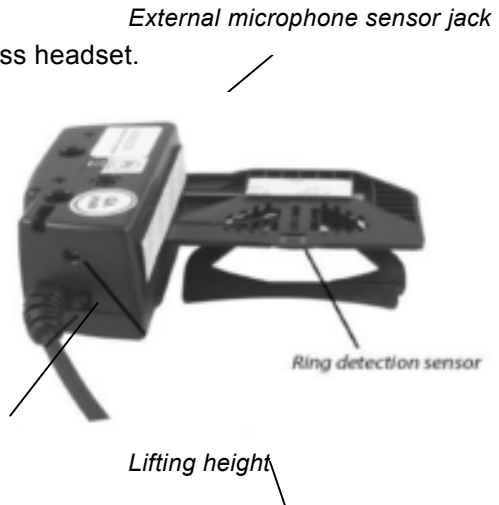

External microphone sensor jack

Ring detection sensor

Lifting height

Surround microphone #2

(Fig 1)

Please follow the instructions below to enable the maximum efficiency from your purchase

## Setting up your handset lifter:

Remove the handset from your telephone.  
Secure the handset lifter over the loud speaker on your telephone, using the attached adhesive tape.  
Ensure the ring detection sensor is placed centrally over your telephone's speaker.  
Plug the lifter cord directly into the port on your base station. You should now be able to answer/end calls using the answer button on your cordless headset.



## Troubleshooting:

### When lifter arm doesn't raise enough.

Check that when the headset is activated, the handset lifter is raising the handset off the hook switch. If the lifter height needs raising, you can change this with the slide switch (Fig 1), to either position 2 or 3.

### When my telephone rings, I do not hear the ring indicator in my headset

Ensure the line cable from the handset lifter is fully plugged into the correct port on your cordless headset's base unit. The ring volume on your telephone may need increasing to enable the microphone sensor to recognize the ringtone.

### The handset lifter does not lift my telephone handset

Manually lift the handset off the telephone base and press your headset button. If you cannot hear dial tone, then check all connections on both units and also your headset configuration.